



Price List 2021 for dealers and professionnels

*Products and system solutions
for thermal insulation, noise
and fire protection*

Prices effective from 1st June, 2021

Isolith – the Austrian producer of wood wool boards !



Tradition and innovation

After Michael Hattinger founded his small production company in 1956, he was not able to realize that his company would be one of the most important suppliers of insulation materials in the future.

For more than 60 years, we have been producing wood-wool boards in Straßwalchen/ Salzburg from natural raw materials: wood, water and cement.

Due to our constant efforts to improve and further develop our products we are able to create new product solutions for our customers. Numerous investments have been made at the Straßwalchen site in recent years.

The strong partnership with the building materials distributors and the close contact to our processing customers guarantees a constant growth for the future.

Values

Handshake quality, great economic understanding and the cultural values such as trust, reliability, fairness, tradition, regionality and environmental awareness:

All this characterizes the family business of Isolith and our customers can take advantage of this professional approach.

Sustainability

As the only Austrian producer of wood-wool boards, the environment is particularly close to our heart.

The raw materials cement and wood are mainly sourced regionally, but certainly from Austria.

This not only strengthens the domestic economy, it also saves unnecessarily long transport routes.

Due to our decades of experience, we know about the special longevity of our products, which are mainly made of the renewable raw material wood and which do not represent a burden for future generations even at the end of their life cycle.

The centrally located production site and the resulting short transport routes to our customers round off our efforts to achieve ecological sustainability.



Table of Contents

Single-layer Boards

| | | |
|------------------------------|-------------------|---|
| Wood wool Single-layer board | Isolith LP | 4 |
| Wood wool Compact Board | Isolith KBP | 5 |

Multilayer Boards

| | | |
|------------------|-------------------|---|
| Multilayer Board | Isolith MS-2..... | 6 |
| Multilayer Board | Isolith MS-3..... | 7 |

Composite Board

| | | |
|--------------------------------|------------------------|---|
| External wall insulation Board | Isolith FDE-21 A2..... | 8 |
|--------------------------------|------------------------|---|

Loft Insulation

| | | |
|-----------------|-----------------------|----|
| Loft Insulation | Isolith OG-03 | 9 |
| | Isolith OG-03/L..... | 10 |
| | Isolith OG-03/F2..... | 11 |

Basement-and underground car park ceilings insulation

| | | |
|----------------------------------|------------------------------|-------|
| Ribbed ceiling insulation system | Isolith RD-S | 12-13 |
| | Isolith DAW | 14 |
| | Isolith DDE-SD A2 | 15 |
| | Isolith KDE-35 A2 natur..... | 16 |
| | Isolith KDE-35 A2 weiß..... | 17 |
| | Isolith KDE-37 | 18 |
| | Isolith KDE-38 | 19 |

Mounting accessories

| | |
|---|-------|
| Facade dowels CS, Retaining clip, Stainless steel anchor, Fold anchor, IDM-R-dowel, Concrete screw FIS, Compact Board screws, Holding plate, Plastic holding plate, PU-Board adhesive, Special processing | 20-24 |
|---|-------|

For your information

Delivery and sale only through specialist dealers.

With this price list, all previous price information are therefor invalid.

All prices listed in this brochure are non-binding guide prices.

The statutory value added tax is added to the prices quoted.

We reserve the right to charge those prices which are in force on the day of delivery. Prices are in accordance with our terms of delivery.

The present documentation corresponds to the status 05/2021.

We are constantly striving to improve our services and to adapt our products to the latest possible standards.

For more detailed information please refer to our homepage or contact us directly.

Single-layer Boards

Wood wool Single-layer Board LP

Cement-bonded wood wool single-layer board according to EN 13168

Characteristics:

- Product type according to standard ÖNORM B 6000 WW
- Universal plaster base
- Euroclass B-s1, d0
- High vapor permeability

Applications:

Thermal insulation, noise and fire protection; for external and internal use; for placing in the formwork before concreting

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.



Delivery program

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|--------------|-------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 15 | 2000 | 500 | 8 | 0,15 | 130 | 12,00 |
| 25 | 2000 | 500 | 11 | 0,30 | 80 | 15,70 |
| 35 | 2000 | 500 | 14 | 0,45 | 60 | 18,20 |
| 50 | 2000 | 500 | 19 | 0,65 | 44 | 23,40 |

Wood wool Compact Board KBP

Cement-bonded wood wool single-layer board according to EN 13168 with increased density and dimensional accuracy

Characteristics:

- Product type according to standard ÖNORM B 6000 WW und WW-PT
- Heat-storing
- Universal plaster base
- High vapor permeability
- Euroclass B-s1, d0
- Naturally resistant to fungus and insects

Applications:

- For the inside and outside planking of wooden constructions such as rafters, beams, etc.
- 25 und 35 mm – planking of wooden constructions with full-surface substructure
- 50 mm – inside and outside planking of wooden constructions
- 75 and 100 mm – erection of single and double-layer partition walls

All compact boards must be glued together in the bed- and butt joints using a suitable adhesive.

Mounting accessories pages 22–23

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.

Delivery program

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² /Pallet | Price €/m ² excl. VAT |
|--------------|-----------|----------|----------------------------------|--|------------------------|----------------------------------|
| 25 | 2000 | 500 | 12,0 | 0,30 | 80 | 16,30 |
| 35 | 2000 | 500 | 15,5 | 0,40 | 60 | 19,90 |
| 50 | 2000 | 500 | 21,0 | 0,55 | 44 | 25,40 |
| 75 | 1000 | 500 | 25,0 | 0,85 | 30 | 36,00 |
| 100 | 1000 | 500 | 32,0 | 1,15 | 22 | 47,00 |



Multilayer Boards

Multilayer Board MS-2

Cement-bonded wood wool double-layer board according to EN 13168 with EPS W15

Characteristics:

- Product type according to standard ÖNORM B 6000 WW-EPS
- Euroclass E
- Universal plaster base

Applications:


For concreting as thermal insulation of components such as walls, ceilings, columns etc.

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.

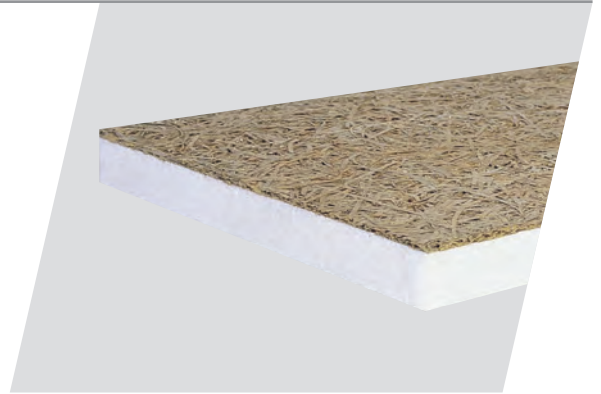

Delivery program

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|--------------|-------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 35 | 2000 | 500 | 4 | 0,85 | 60 | 18,70 |
| 50 | 2000 | 500 | 4,5 | 1,30 | 44 | 24,20 |
| 75 | 2000 | 500 | 5 | 1,85 | 30 | 34,00 |
| 100 | 2000 | 500 | 6 | 2,50 | 22 | 43,40 |

Multilayer Board MS-3

Cement-bonded wood wool tripple-layer board according to EN 13168 with EPS W15

Characteristics:

- Product type according to standard ÖNORM B 6000 WW-EPS-WW
- Euroclass E
- Universal plaster base

Applications:

For concreting or retrofitting as thermal insulation of components such as walls, ceilings, columns etc.

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.



Delivery program

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _p -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|--------------|-------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 35 | 2000 | 500 | 7,5 | 0,80 | 60 | 20,30 |
| 50 | 2000 | 500 | 8,0 | 1,23 | 44 | 27,10 |
| 75 | 2000 | 500 | 8,5 | 1,80 | 30 | 36,60 |
| 100 | 2000 | 500 | 9,0 | 2,45 | 22 | 47,80 |
| 125 | 2000 | 500 | 9,5 | 3,00 | 18 | 60,20 |

External wall insulation Board

External wall insulation Board FDE-21 A2

Cement-bound tripple-layer board according to EN 13168
with mineral wool core

Characteristics:

- Product type according to standard ÖNORM B 6000 WW-MW-WWH 30
- Euroclass A2-s1, d0
- Excellent thermal insulation
- High vapor permeability
- Soundproofing
- Universal plaster base

Applications:

- For insulation of ceilings and walls
- For insulation of facades as part of an External thermal insulation composite system (ETICS)
- Mounting accessories pages 20–23

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.



Delivery program Standard

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _p -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|--------------|-------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 50 | 2000 | 500 | 13,0 | 1,21 | 44 | 45,90 |
| 75 | 2000 | 500 | 16,0 | 1,88 | 30 | 61,70 |
| 100 | 2000 | 500 | 19,0 | 2,56 | 22 | 80,20 |
| 125 | 2000 | 500 | 22,0 | 3,23 | 18 | 96,60 |
| 150 | 2000 | 500 | 24,0 | 3,91 | 16 | 112,10 |
| 175 | 2000 | 500 | 27,0 | 4,59 | 12 | 129,30 |
| 200 | 2000 | 500 | 30,0 | 5,26 | 10 | 150,00 |

Delivery program ETICS

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _p -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|--------------|-------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 50 | 1000 | 500 | 13,0 | 1,21 | 44 | 45,90 |
| 75 | 1000 | 500 | 16,0 | 1,88 | 30 | 61,70 |
| 100 | 1000 | 500 | 19,0 | 2,56 | 22 | 80,20 |
| 125 | 1000 | 500 | 22,0 | 3,23 | 18 | 96,60 |
| 150 | 1000 | 500 | 24,0 | 3,91 | 16 | 112,10 |
| 175 | 1000 | 500 | 27,0 | 4,59 | 12 | 129,30 |
| 200 | 1000 | 500 | 30,0 | 5,26 | 10 | 150,00 |

Loft Insulation

Loft Insulation OG-03

Composite Board made of non-combustible, highly compressed mineral wool according to EN 13162 with a 10 mm non-combustible special board and all-round 30 mm step fold

Characteristics:

- Mineral wool: Product type according to standard ÖNORM B 6000 MW-WD
- Excellent thermal insulation
- Simple, dry installation
- Handy format
- Walkable and resilient

Applications:

- In undeveloped and rarely used lofts
- When used on floors in dryingroom, the element must be protected from dripping moisture.
- Flat surface required!
- A damp proof membrane is required for timber beam ceilings!

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.

Delivery program

| Thickness mm | Length* mm | Width* mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|---------------|--------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 120 | 1000 | 625 | 27,0 | 3,10 | 18,750 | 66,20 |
| 150 | 1000 | 625 | 31,0 | 3,95 | 15,000 | 72,20 |
| 170 | 1000 | 625 | 34,0 | 4,50 | 11,250 | 77,60 |
| 180 | 1000 | 625 | 35,0 | 4,80 | 11,250 | 80,20 |
| 210 | 1000 | 625 | 38,5 | 5,60 | 9,375 | 87,70 |

* Coverage measure = Invoice measure (outer dimension 1030 x 655)

Other thicknesses on request

Dimensional tolerances:

Insulation: according to EN 13162

Production: +/- 2 mm

Technical characteristics:


Permanent load: 200 kg/m²

Vapour resistivity Mineral wool: 1 μ

Vapour resistivity Cover board: 10 μ

Euroclass according to EN 13501-1 MW: A1-s1, d0

Euroclass Cover board: A2-s1, d0

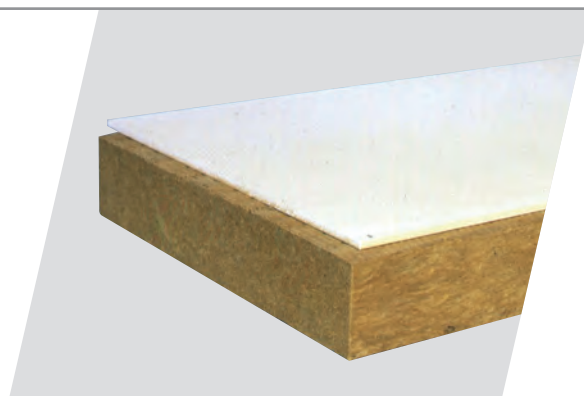

Loft Insulation OG-03/L

Composite Board made of non-combustible, highly compressed mineral wool according to EN 13162 with a 10 mm non-combustible special board and all-round 15 mm step fold

Characteristics:

- Mineral wool: Product type according to standard ÖNORM B 6000 MW-WD
- Excellent thermal insulation
- Simple, dry installation
- Handy format
- Walkable and resilient

Applications:

- In undeveloped and normally used lofts.
- When used on floors in drying room, the element must be protected from dripping moisture.
- Flat surface required!
- A damp proof membrane is required for timber beam ceilings!

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.

Delivery program

| Thickness mm | Length* mm | Width* mm | Weight approx. kg/m ² | R ₀ -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|---------------|--------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 100 | 1000 | 625 | 24,0 | 2,60 | 23,40 | 64,00 |
| 130 | 1000 | 625 | 28,0 | 3,40 | 17,55 | 72,00 |
| 150 | 1000 | 625 | 31,0 | 3,95 | 15,60 | 76,30 |
| 180 | 1000 | 625 | 35,0 | 4,80 | 11,70 | 83,30 |
| 200 | 1000 | 625 | 37,0 | 5,35 | 11,70 | 88,10 |

* Coverage measure: 1000 x 625 mm (outer dimension = Invoice measure: 1015 x 640 mm)

Other thicknesses on request

Dimensional tolerances:

Insulation: according to EN 13162

Production: +/- 2 mm

Technical characteristics:


Permanent load: 200 kg/m²

Vapour resistivity Mineral wool: 1 μ

Vapour resistivity Cover board: 10 μ

Euroclass according to EN 13501-1 MW: A1-s1, d0

Euroclass Cover board: A2-s1, d0

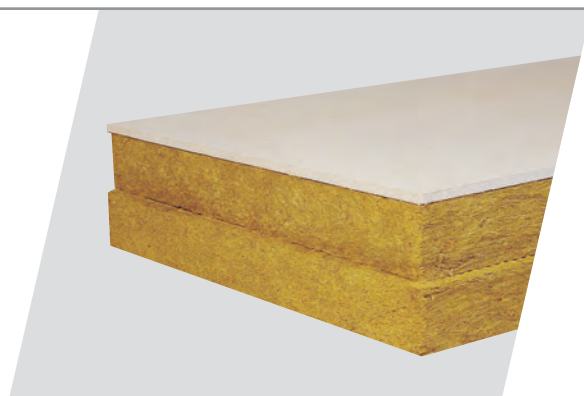

Loft Insulation OG-03/F2

Composite Board made of non-combustible, highly compressed mineral wool according to EN 13162 with 2 x 10 mm non-combustiblespecial board and all-round 30 mm step fold

Characteristics:

- Mineral wool: Product type according to standard ÖNORM B 6000 MW-WD
- Excellent thermal insulation
- Simple, dry installation
- Handy format
- Walkable and resilient

Applications:

- In undeveloped and normally used lofts.
- When used on floors in dryingroom, the element must be protected from dripping moisture.
- Flat surface required!
- A damp proof membrane is required for timber beam ceilings!

Packaging:

In full packaging units on factory pallets (Deposite € 12,00/pcs.),

Dry storage required

Weatherproof packaging for a surcharge € 3,45 /Pal.

Delivery program

| Thickness mm | Length* mm | Width* mm | Weight approx. kg/m ² | R ₀ -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|---------------|--------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 140 | 1000 | 625 | 40,5 | 3,45 | 15,000 | 72,00 |
| 160 | 1000 | 625 | 43,0 | 4,00 | 13,125 | 78,70 |
| 180 | 1000 | 625 | 46,0 | 4,60 | 11,250 | 85,30 |
| 200 | 1000 | 625 | 48,5 | 5,15 | 11,250 | 91,90 |
| 220 | 1000 | 625 | 51,0 | 5,70 | 9,375 | 98,50 |

* Coverage measure = Invoice measure (outer dimension 1030 x 655)

Other thicknesses on request

Dimensional tolerances:

Insulation: according to EN 13162

Production: +/- 2 mm

Technical characteristics:


Permanent load: 250 kg/m²

Vapour resistivity Mineral wool: 1 μ


Vapour resistivity Cover board: 10 μ

Euroclass according to EN 13501-1 MW: A1-s1, d0

Euroclass Cover board: A2-s1, d0

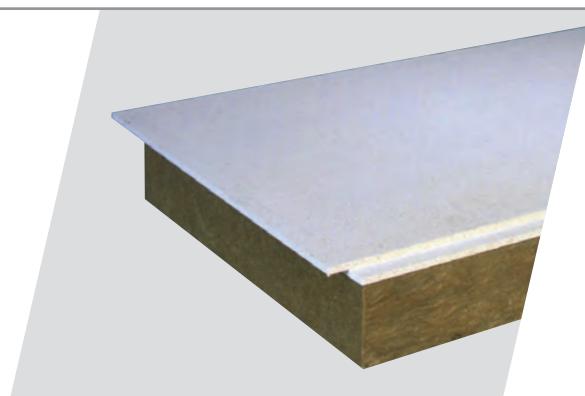

Ribbed ceiling insulation system – components

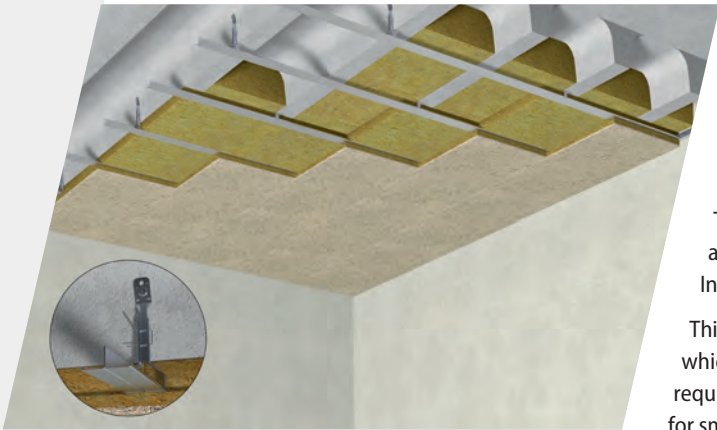

Ribbed ceiling system RD-S

The robust, durable and mold-resistant insulation solution for rib ceilings

The ribbed insulation system from Isolith consists of natural materials and represents a new insulation solution for ribbed ceilings.

The insulation system has an extremely robust, long-lasting and sound absorbing top layer made of wood wool and is available in different insulation thicknesses.

This mold-resistant insulation solution for ribbed ceilings is freely adjustable, which means that the thickness of the insulation material fulfills various requirements. Isolith RD-S ribbed ceiling system also offers an optimal solution for small ceiling areas.


RD-P system board A2: 35 mm

Non-combustible two-layer board made of mineral wool and on one side cement bound fine wood wool top layer 10 mm.

Edges chamfered on all sides, visible side colored in beige natural color.

Delivery program

| Length mm | Width mm | Packaging unit m ² | Price €/m ² excl. VAT |
|-----------|----------|-------------------------------|----------------------------------|
| 1000 | 500 | 60 | on request |

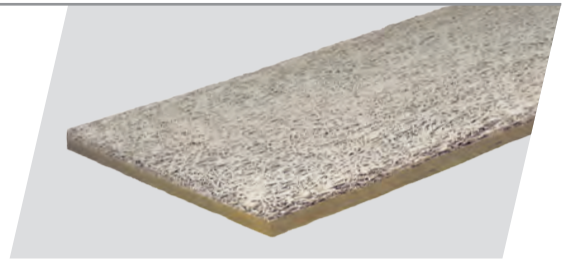


T-PROFILE made of galvanized sheet steel: 0.6 mm

Consumption/m²:

2,0 rm

Delivery program

| Length mm | Profile height mm | Price €/rm excl. VAT |
|-----------|-------------------|----------------------|
| 4000 | 30 | on request |

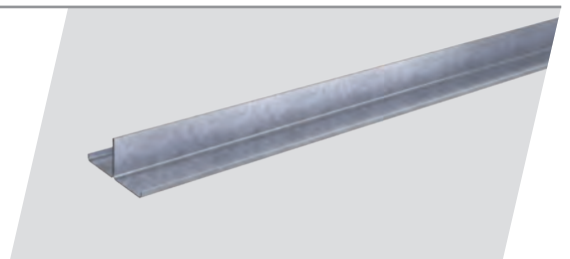


U-PROFILE made of galvanized sheet steel: 0.6 mm

Consumption/m²:

0,5 rm

Delivery program

| Length mm | Profile height mm | Price €/rm excl. VAT |
|-----------|-------------------|----------------------|
| 3000 | 30 | on request |

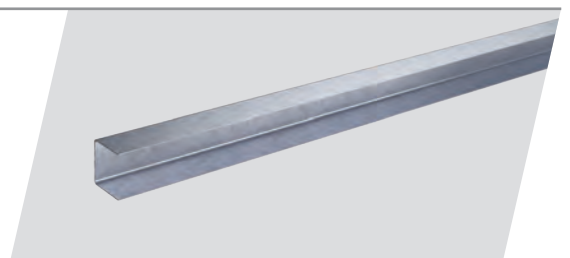

RDS-System Screws


High and low thread with tip and flat head, colored light beige.

Consumption/m²:

18 pcs.

Delivery program

| Length mm | Ø mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|--------------|---------|------------------------|-------------------------------|
| 50 | 4,2 | 300 | on request |

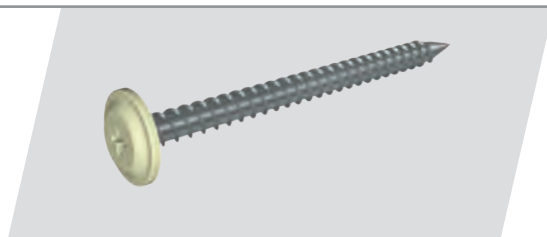


U-split pin for vernier, galvanized steel

Consumption/m²:

2 pcs.

Delivery program

| Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|------------------------|-------------------------------|
| 100 | on request |

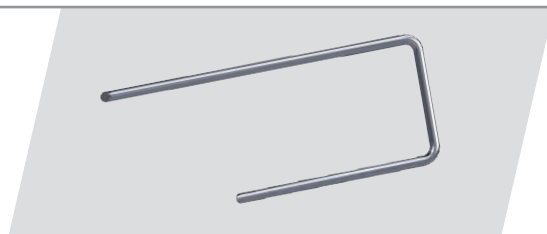

NO Vernier upper part, galvanized steel, perforated

Suspension height 125–150 mm

Consumption/m²:

2 pcs.

Delivery program

| Length mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|--------------|------------------------|-------------------------------|
| 72 | 100 | on request |



NB Vernier bracket, galvanized steel, perforated

Consumption/m²:

2 pcs.

Delivery program

| Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|------------------------|-------------------------------|
| 100 | on request |



Mineral Wool

According to building physics requirements

Basement- and underground car park ceilings insulation

Ceiling formwork angle DAW

Characteristics:

- Prefabricated angle
- No additional formwork required
- Light weight
- High strength
- Euroclass E
- Simple to install

Applications:

- To insulate the ceiling edge
- Assembly is done by gluing, nailing or placing in a mortar bed

Packaging:

In full packaging units on factory pallets

Note:

With 35 mm thickness additional support is required!

Delivery program

| Sandwich insulation Typ/mm | Length mm | rm/ Pallet | Price €/rm excl. VAT |
|----------------------------|-----------|------------|----------------------|
| 160/35 | 2000 | 288 | 11,50 |
| 160/50 | 2000 | 192 | 12,50 |
| 160/75 | 2000 | 144 | 14,60 |
| 180/35 | 2000 | 240 | 11,80 |
| 180/50 | 2000 | 160 | 13,10 |
| 180/75 | 2000 | 120 | 14,90 |
| 200/35 | 2000 | 240 | 12,00 |
| 200/50 | 2000 | 160 | 13,60 |
| 200/75 | 2000 | 120 | 15,50 |
| 220/35 | 2000 | 192 | 12,60 |
| 220/50 | 2000 | 128 | 13,80 |
| 220/75 | 2000 | 96 | 16,00 |
| 250/35 | 2000 | 192 | 13,10 |
| 250/50 | 2000 | 128 | 14,50 |
| 250/75 | 2000 | 96 | 16,70 |
| 300/35 | 2000 | 144 | 13,60 |
| 300/50 | 2000 | 96 | 15,70 |
| 300/75 | 2000 | 72 | 18,10 |

Uninsulated:

Angle made of ISOLITH LP board 35 mm according to ÖNORM EN 13168 Euroclass B

| Height | Packaging unit per rm / Pallet | Price €/rm excl. VAT |
|--------------|--------------------------------|----------------------|
| bis 19 cm | 240 | 11,50 |
| 20 bis 25 cm | 192 | 11,90 |



DDE-SD A2 for concreting

Cement-bound tripple-layer board according to EN 13168 with mineral wool core, one-sided thicker cover layer and all-round 15 mm step fold

Characteristics:

- Product type according to standard ÖNORM B 6000 WW-MW-WWH 50
- Euroclass A2-s1, d0
- Excellent thermal insulation
- Sound absorbing

Applications:

- For insertion as lost formwork in ceilings and walls especially in underground car parks.
The thicker covering layer must face the concrete.
- Stainless steel anchors or fold anchors are suitable as adhesion safeguard (Observe the installation guidelines).
- Mounting accessories pages 20–23



Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.), dry storage required, weatherproof packaging for a surcharge € 3,45 /Pal.

Delivery program

| Thickness mm | Length* mm | Width* mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² /Pallet | Price €/m ² excl. VAT |
|--------------|------------|-----------|----------------------------------|--|------------------------|----------------------------------|
| 50 | 2000 | 500 | 17 | 1,05 | 44 | 52,10 |
| 75 | 2000 | 500 | 20 | 1,75 | 30 | 64,00 |
| 100 | 2000 | 500 | 22 | 2,40 | 22 | 82,40 |
| 125 | 2000 | 500 | 23 | 3,05 | 18 | 98,80 |
| 150 | 2000 | 500 | 25 | 3,70 | 16 | 115,20 |
| 175 | 2000 | 500 | 28 | 4,35 | 12 | 132,00 |
| 200 | 2000 | 500 | 31 | 5,00 | 10 | 161,00 |

* Outer dimension (Coverage measure with step fold: 1985 x 485).

Technical characteristics:

Tensile strength perpendicular to faces: 15 kPa

Compressive strength at 10% deformation: 50 kPa

Cover strips for front contour, natural

Packaging:

WW thread width 3 mm

In full units as an additional cargo

Delivery program

| Width mm | Length mm | Thickness mm | Packaging unit pcs. | Price €/rm excl. VAT |
|----------|-----------|--------------|---------------------|----------------------|
| 45 | 1000 | 12 | 10 | 3,90 |
| 70 | 1000 | 12 | 10 | 4,50 |
| 95 | 1000 | 12 | 10 | 5,20 |
| 120 | 1000 | 12 | 10 | 6,00 |
| 145 | 1000 | 12 | 10 | 7,20 |
| 170 | 1000 | 12 | 10 | 8,00 |
| 195 | 1000 | 12 | 10 | 8,90 |



Basement-and underground car park ceilings insulation

KDE-35 A2 white

Cement-bound double-layer board according to EN 13168.
All sides chamfered edges, surface colored white. WW thread width 2 mm

Characteristics:

- Product type according to standard ÖNORM B 6000 WW-MW
- Excellent thermal Insulation
- Euroclass A2-s1, d0
- Improvement of fire protection (heat shield)
- Sound absorbing

Applications:

- For the subsequent thermal and acoustic improvement of basement- and garage ceilings and walls
- Mounting accessories pages 20–23

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)
Weatherproof packaging for a surcharge € 3,45/Pal

Delivery program

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² /Pallet | Price €/m ² excl. VAT |
|--------------|-----------|----------|----------------------------------|--|------------------------|----------------------------------|
| 50 | 1000 | 500 | 12 | 1,25 | 44 | 52,70 |
| 75 | 1000 | 500 | 14 | 1,95 | 30 | 63,10 |
| 100 | 1000 | 500 | 17 | 2,70 | 22 | 78,50 |
| 125 | 1000 | 500 | 19 | 3,40 | 18 | 96,10 |
| 150 | 1000 | 500 | 23 | 4,10 | 16 | 112,50 |
| 175 | 1000 | 500 | 26 | 4,80 | 12 | 134,00 |
| 200 | 1000 | 500 | 29 | 5,55 | 10 | 157,70 |




Cover strips for front contour, white

Packaging:

WW thread width 2 mm
In full units as an additional cargo

Delivery program

| Width mm | Length mm | Thickness mm | Packaging unit pcs. | Price €/rm excl. VAT |
|----------|-----------|--------------|---------------------|----------------------|
| 45 | 1000 | 12 | 10 | 4,30 |
| 70 | 1000 | 12 | 10 | 5,00 |
| 95 | 1000 | 12 | 10 | 5,70 |
| 120 | 1000 | 12 | 10 | 6,70 |
| 145 | 1000 | 12 | 10 | 7,90 |
| 170 | 1000 | 12 | 10 | 8,80 |
| 195 | 1000 | 12 | 10 | 10,00 |

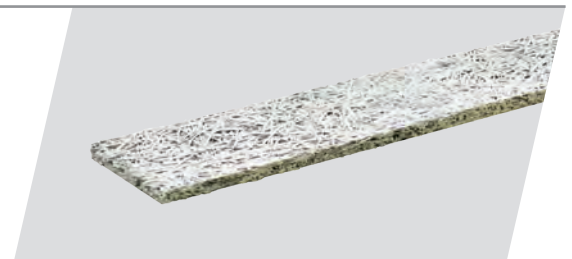

KDE-35 A2 natural

Cement-bound double-layer board according to EN 13168.
All sides chamfered edges, surface uncolored natural. WW thread width 2 mm

Characteristics:

- Product type according to standard ÖNORM B 6000 WW-MW
- Excellent thermal insulation
- Euroclass A2-s1, d0
- Improvement of fire protection (heat shield)
- Sound absorbing

Applications:


- For the subsequent thermal and acoustic improvement of basement- and garage ceilings and walls
- Mounting accessories pages 20–23

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)
Weatherproof packaging for a surcharge € 3,45/Pal

Delivery program

| Thickness mm | Length mm | Width mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² /Pallet | Price €/m ² excl. VAT |
|--------------|-----------|----------|----------------------------------|--|------------------------|----------------------------------|
| 50 | 1000 | 500 | 12 | 1,25 | 44 | 50,60 |
| 75 | 1000 | 500 | 14 | 1,95 | 30 | 60,90 |
| 100 | 1000 | 500 | 17 | 2,70 | 22 | 76,10 |
| 125 | 1000 | 500 | 19 | 3,40 | 18 | 93,90 |
| 150 | 1000 | 500 | 23 | 4,10 | 16 | 110,40 |
| 175 | 1000 | 500 | 26 | 4,80 | 12 | 131,70 |
| 200 | 1000 | 500 | 29 | 5,55 | 10 | 156,10 |

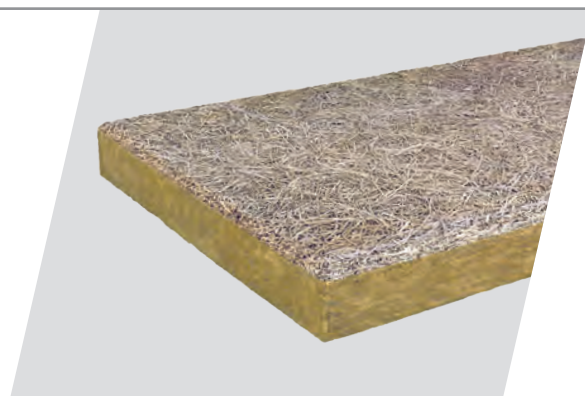

* Wood is a grown natural product.
Color differences are a sign of authenticity.
For a guaranteed uniform appearance of the surface, we recommend our colored version.

Note: Use the appropriate ones concrete screws FIS in gray!

Cover strips for front contour, natural

Packaging:

WW thread width 2 mm
In full units as an additional cargo

Delivery program

| Width mm | Length mm | Thickness mm | Packaging unit pcs. | Price €/rm excl. VAT |
|----------|-----------|--------------|---------------------|----------------------|
| 45 | 1000 | 12 | 10 | 3,90 |
| 70 | 1000 | 12 | 10 | 4,50 |
| 95 | 1000 | 12 | 10 | 5,20 |
| 120 | 1000 | 12 | 10 | 6,00 |
| 145 | 1000 | 12 | 10 | 7,20 |
| 170 | 1000 | 12 | 10 | 8,00 |
| 195 | 1000 | 12 | 10 | 8,90 |



KDE-37

Composite board made of EPS foam according to EN 13163 with tongue and groove and non-combustible 10 mm thick special board

Characteristics:

- Euroclass B-s1, d0
- Stable, flat surface
- Simple installation
- Light weight

Applications:

- Subsequent thermal insulation of basement ceilings
- Mounting accessories pages 20–23

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45/Pal.

Delivery program

| Thickness mm | Length* mm | Width* mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|---------------|--------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 50 | 1020 | 645 | 9 | 1,40 | 43,56 | 38,60 |
| 75 | 1020 | 645 | 10 | 2,20 | 29,70 | 52,90 |
| 100 | 1020 | 645 | 11 | 3,00 | 23,76 | 66,50 |
| 125 | 1020 | 645 | 12 | 3,80 | 17,82 | 80,60 |

* Coverage measure: 1000 x 625 mm (outer dimension = Invoice measure: 1020 x 645 mm)

Technical characteristics:

Vapour resistivity EPS: 50 μ

Vapour resistivity Cover board: 10 μ

Euroclass according to EN 13501-1

EPS: E

Cover board: B-s1, d0



KDE-38

Composite board made of non-combustible mineral wool according to EN 13162 with a 10 mm non-combustible special board and 15 mm step fold all round

Characteristics:

- Excellent thermal insulation
- Stable, flat surface
- Simple installation

Applications:


- Subsequent thermal insulation of basement ceilings
- Mounting accessories pages 20–23

Packaging:

In full packaging units on factory pallets (Deposit € 12,00/pcs.)

Dry storage required

Weatherproof packaging for a surcharge € 3,45/Pal.

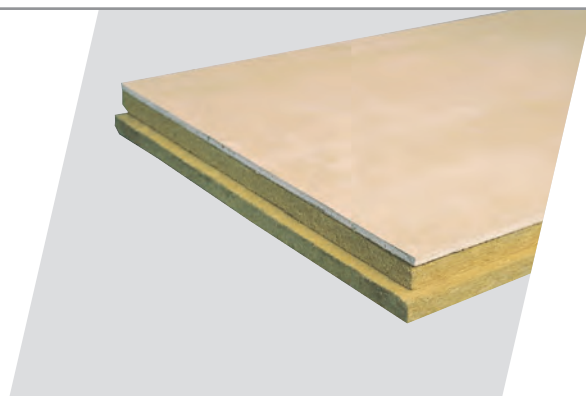

Delivery program

| Thickness mm | Length* mm | Width* mm | Weight approx. kg/m ² | R _D -Value (m ² K/W) | m ² / Pallet | Price €/m ² excl. VAT |
|-----------------|---------------|--------------|-------------------------------------|---|----------------------------|-------------------------------------|
| 60 | 1015 | 640 | 18 | 1,45 | 39,00 | 47,00 |
| 100 | 1015 | 640 | 21 | 2,55 | 23,40 | 60,20 |
| 130 | 1015 | 640 | 24 | 3,40 | 17,55 | 67,00 |

* Coverage measure: 1000 x 625 mm (outer dimension = Invoice measure: 1015 x 640 mm)

Dimensional tolerances:

Insulation: according to EN 13162

Production: +/- 2 mm

Technical characteristics:

Permanent load: 200 kg/m²

Vapour resistivity MW: 1 μ

Vapour resistivity Cover board: 10 μ

Euroclass according to EN 13501-1

MW: A1-s1, d0

Cover board: A2-s1, d0

Mounting accessories

Dowel CS

Plastic dowel with steel screw, drill hole 8 mm, anchoring depth at least 35 mm


Application: Fixing ISOLITH insulation boards in concrete, bricks and natural stone

Bedarf: Approx. 8 – 10 pcs./m²

Packaging: In boxes

Delivery program

| Length mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|-----------|---------------------|----------------------------|
| 115 | 200 | 39,80 |
| 135 | 200 | 46,20 |
| 155 | 200 | 50,40 |
| 175 | 200 | 54,60 |
| 195 | 200 | 60,70 |
| 215 | 100 | 108,10 |

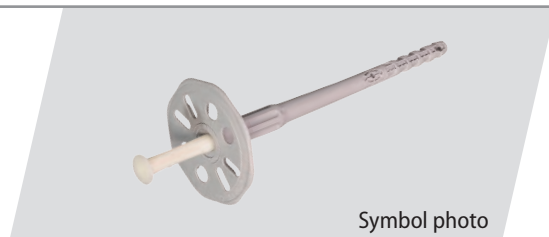

Symbol photo

Stainless steel anchors

Application: Additional non-combustible adhesion safeguard when concreting ISOLITH DDE-SD as a lost formwork.

Consumption: Approx. 6 – 8 pcs./m² (Observe the installation guidelines)

Packaging: In boxes

Delivery program

| Length mm | for Board thickness mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|-----------|------------------------|---------------------|----------------------------|
| 95 | 50 | 250 | 40,00 |
| 115 | 75 | 250 | 42,90 |
| 155 | 125/100 | 250 | 50,90 |
| 175 | 150 | 250 | 58,80 |
| 200 | 175 | 250 | 66,40 |
| 225 | 200 | 250 | 71,40 |



Retaining clip


Application: For fixing 10 mm plasterboard strips (max. 30 cm wide) when using KDE-37 and KDE-38

Consumption: Approx. 6 pcs./m²

Packaging: In PE-bags

Delivery program

| Length mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|-----------|---------------------|----------------------------|
| 40 | 100 | 156,00 |

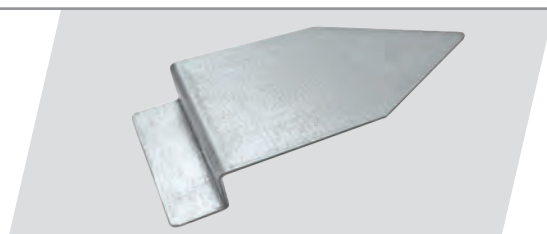

Fold anchor

Application:

Additional invisible adhesion safeguard when concreting ISOLITH DDE-SD as a lost formwork up to a thickness of 175 mm; Application: boards remain unplastered

Minimum consumption: 4 pcs./m²

Packaging: In boxes

Delivery program

| Size | For Board thickness mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|------|------------------------|---------------------|----------------------------|
| II | 50/75 | 250 | 26,40 |
| IV | 100/125 | 200 | 27,90 |
| V | 150/175 | 200 | 47,40 |



IDM-R-Dowel

Made of stainless steel, non-combustible, drillhole 8 mm

Application: For retrofitting ISOLITH insulation boards in rooms with Requirements for corrosion resistance, e.g. in underground car parks. Can only be used in concrete ceilings!

Consumption: Approx. 6–8 pcs./m²

Packaging: In boxes

Delivery program

| Length mm | For Board thickness mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|-----------|------------------------|---------------------|----------------------------|
| 110 | 50 | 250 | 87,70 |
| 140 | 75 | 250 | 102,70 |
| 170 | 100 | 250 | 139,60 |
| 200 | 125 | 250 | 234,70 |



Concrete screws FIS

Rustproof steel screw with special thread
drillhole 6 mm, minimum anchoring 25 mm; Plate diameter 36 mm, Bit 25 TX

Application: For fixing of ISOLITH insulation boards on concrete


Consumption: 8 pcs./m²

Packaging: In boxes

Delivery program

| Length mm | for Board thickness mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|-----------|------------------------|---------------------|----------------------------|
| 50 | 25 | 100 | 57,50 |
| 65* | 35 | 100 | 59,70 |
| 75 | 50 | 100 | 62,90 |
| 100 | 75 | 100 | 87,60 |
| 125 | 100 | 100 | 102,50 |
| 150 | 125 | 100 | 122,10 |
| 175 | 150 | 100 | 150,40 |
| 200 | 175 | 100 | 200,10 |
| 225 | 200 | 100 | 255,90 |

* only available in white

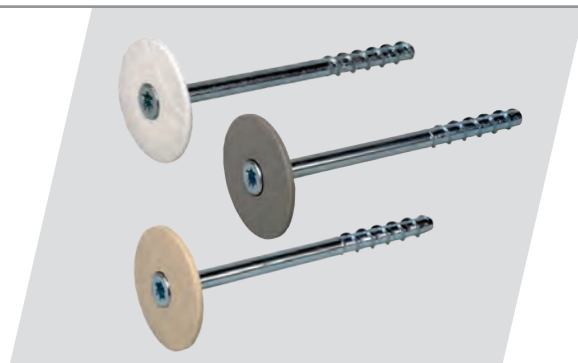

Available in the colors white, gray and beige

Compact Board Screws

rustproof

Application: For fixing ISOLITH insulation boards to wooden constructions

Consumption: Approx. 12 pcs./m²

Packaging: In boxes

Delivery program

| Length mm | Ø mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|-----------|------|---------------------|----------------------------|
| 60 | 5 | 100 | 20,40 |
| 80 | 5 | 100 | 25,80 |
| 100 | 5 | 100 | 34,30 |
| 120 | 5 | 100 | 39,40 |



Holding plate

Galvanized, Ø 36 mm, perforated

Application: For fixing ISOLITH insulation boards using wood screws to wooden constructions

Consumption: Approx. 8 – 10 pcs./m²

Packaging: In boxes

Delivery program

| Size mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|---------|---------------------|----------------------------|
| 36 | 100 | 28,90 |



Plastic holding plate

Made of polyamide, Ø 36 mm, perforated

Application: For fixing ISOLITH insulation boards using wood screws to wooden constructions

Consumption: Approx. 8 – 10 pcs./m²

Packaging: In boxes

Delivery program

| Size mm | Packaging unit pcs. | Price €/100 pcs. excl. VAT |
|---------|---------------------|----------------------------|
| 36 | 100 | 30,70 |



PU-Board adhesive

Application: For glueing ISOLITH compact boards and for glueing front contour

Consumption: When used to bond Isolith KBP in timber construction: approx. 100 g/m².

When used to glue the cover strips for the front contour:

| cover strip width mm | Requirement g/Linear meters |
|----------------------|-----------------------------|
| 45 | 35 |
| 70 | 40 |
| 95 | 50 |
| 120 | 65 |
| 145 | 80 |
| 170 | 100 |
| 195 | 115 |

Delivery program

| Packaging unit Tubular bag | Price €/pcs. excl. VAT |
|----------------------------|------------------------|
| 900g | 30,10 |



Special processing

Special processing

| Edge formation (bevel) | Nettoprice €/m ² excl. VAT | Coloring according to the overview map RAL-F2 to the RAL 840 HR color register | Nettoprice €/m ² excl. VAT |
|------------------------|--|---|--|
| Alongside | 2,00 | White | 2,60 |
| Front | 2,00 | Pastel colors* | 3,20 |
| On all sides | 2,60 | Solid colors* | 6,90 |

* Minimum order quantity per color shade 150 m²
Adjustment costs per color € 150,-

